

ACCESSORIES

Standard Clock Hanger

Painted Steel



Hang electric clocks from a recessed 1-gang wall plate that comes with a UL Listed single receptacle. Receptacle has three lead wires, each 6 inches in length, and is rated at 15 amps at 125 volts. Comes with a sturdy clock hanger hook.


White Semi-Gloss	White Wrinkle	Ivory Semi-Gloss	Ivory Wrinkle	Brown Wrinkle	Aluminum
Painted Steel	Painted Steel	Painted Steel	Painted Steel	Painted Steel	Painted Steel
(3WIHPWA)	(3WIHPDW)	(3WIHPA)	(3WIHPDI)	(3WIHPDB)	(3WIHPSL)
40582	40583	40581	40585	40584	40586

For related items, see Page 83.

Stainless Steel, Aluminum, Chrome, Brass & Bronze

304 Type Stainless Steel	430 Type Stainless Steel	Aluminum	Aluminum	Chrome Plated	Solid Brass	Solid Bronze
Satin Finish	Satin Finish	Satin Finish	Clear Anodized	Steel Polished	Satin Finish US#4	Satin Finish US#10
(3WIHP302SS)	(3WIHPSS)	(3WIHP4AA)	(3WIHP5AA)	(3WIHP4CA)	(3WIHP4BB)	(3WIHP4SBR)
40591	40590	40587	40588	40589	40592	40595

Energy-Saving Insulating Gaskets

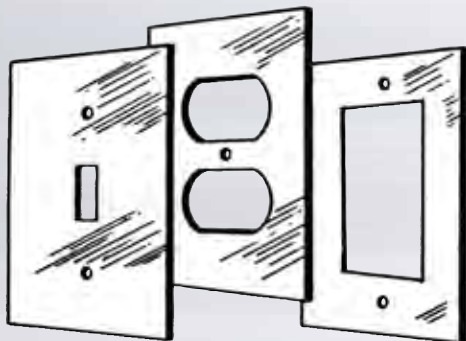

Comply With Current Code Requirements

Mulberry's energy saving gaskets prevent the loss of heat and cold through outlets and switches located on outside walls. Constructed of UL Listed cross-link, close cell polyethylene insulating foam, they are available for single gang switch and duplex receptacles. UL Listed as fire-retardant. Easy to install, they can be ganged by trimming or overlapping.



40671

1 Toggle Switch



40601

1 Duplex Receptacle



40635

1 GFI Receptacle

Box: 50 Carton: 500